(19) World Intellectual Property Organization International Bureau





(43) International Publication Date 30 October 2003 (30.10.2003)

PCT

(10) International Publication Number WO 03/090335 A1

(51) International Patent Classification7:

H02M 1/00

(21) International Application Number: PCT/EP03/03826

(22) International Filing Date: 12 April 2003 (12.04.2003)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: 102 17 951.4

22 April 2002 (22.04.2002) DE

(71) Applicant (for all designated States except US): THOM-SON LICENSING S.A. [FR/FR]; 46 Quai A. le Gallo, F-92100 Boulogne-Billancourt (FR).

(72) Inventors; and

- (75) Inventors/Applicants (for US only): HERMANN, Wolfgang [DE/DE]; Berneck 97, 78144 Tennenbronn (DE). STOLTE, John, F. [NL/DE]; Überaucherstr. 16, 78052 Villingen-Schwenningen (DE). LOUVEL, Jean-Paul [FR/DE]; Am Boegle 30, 78086 Brigachtal (DE).
- (74) Agent: ROSSMANITH, Manfred; Deutsche Thomson-Brandt GmbH, European Patent Operations, Karl-Wiechert-Allee 74, 30625 Hannover (DE).


- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: CIRCUIT ARRANGEMENT WITH POWER FACTOR CORRECTION, AND CORRESPONDING APPLIANCE

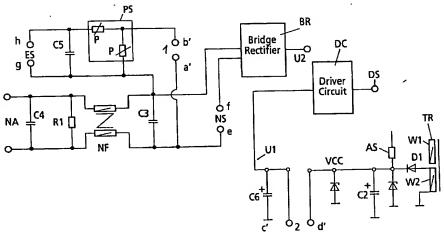

(57) Abstract: The circuit arrangement has a mains connection (NA), a mains switch with two switching contacts (1, 2), a demagnetization coil (ES) and a switch-mode power supply, which contains a driver circuit (DC) for producing a control voltage (DS) for the switching transistor of the switch-mode power supply. A first switching contact (1) of the mains switch is arranged between the mains connection and the demagnetization coil in order to switch the demagnetization coil on and off, and the second switching contact (2) is connected to a supply or control voltage (VCC) for the driver circuit (DC), in order to switch off the switch-mode power supply. In consequence, a power factor coil (NS) can be used between the mains connection (NA) and the switch-mode power supply for power factor correction, without the mains switch being loaded by the inductance of the power factor coil.

255000/50 O/